


GB Electronics (UK) Ltd

LF1-400-3kW-GBE Frequency Converter - datasheet

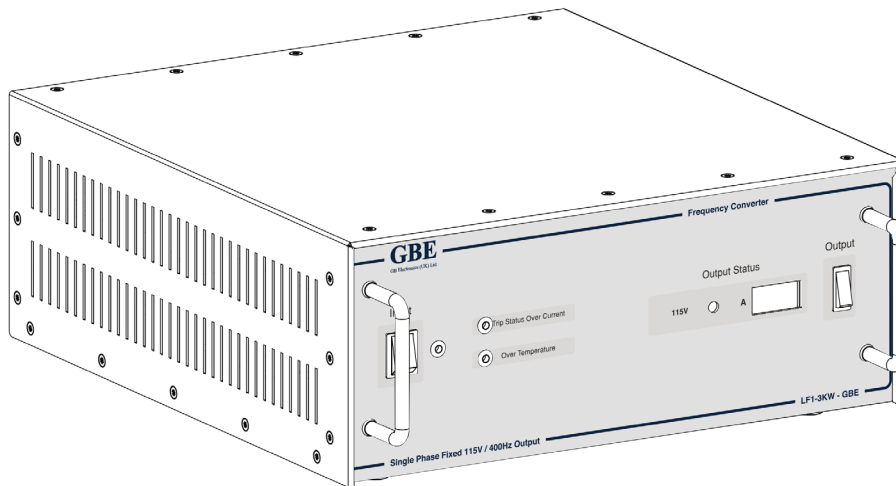

115V 400Hz Single Phase output, at up to 3kVA

The LF1-400-3kW-GBE frequency converter offers low price fixed voltage single phased full isolation between the output voltage and the incoming supply, and the output neutral may be earthed externally if required. The unit is fully protected against overcurrent and temperature conditions, LF1-400-3kW-GBE are supplied with input and output cables. This LF1-400-3kW-GBE is normally supplied as a free standing bench top unit; but can also be built in a rack mount configuration if required at no extra cost. A support shelf or bracket would be required when the rack mounting option if specified: these are not supplied with the unit, as their dimensions will depend on the arrangement of the cabinet or rack.

Input Requirement

230V single phase, +10% / - 6%, 45 – 66Hz

Output Capability

115V 400Hz +/-1Hz, at up to 3kVA (26A max)

Overcurrent trip at >3600VA

Short circuit and overtemperature protection

Load Power Factor 0.5 lag to 0.5 lead at full load

With linear load, line regulation +/-1%, load regulation +/-1%

THD better than 5% and full-load efficiency >80%

Controls, Indications & Connections

Input On/Off switch and indicator, Output On/Off switch

Output Voltage and Output Current analogue meters

Over Current and Over Temperature indicators

IEC inlet connector, twist-lock output connector

Input and output cables supplied

Operating Environment

0 to +40 degrees

90% non condensing

Size & Weight

449mm wide x 476mm (Case) 562mm (With Handels) deep x 177mm high (4u in 19 Inch rack) 36kg

GBE

GB Electronics (UK) Ltd

Although the information and recommendations on this document are presented in good faith and believed to be correct, GBE makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will GBE be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this datasheet or the products to which the information refers. GBE does not warrant the accuracy or timeliness of the materials on this datasheet and has no liability for any errors or omissions in the materials.

 www.gbelectronics.uk

 andrew.liddle@gbelectronics.com

 +44 (0) 7581 397 755

 Ascot House // Mulberry Close // Woods Way
Goring By Sea // West Sussex // BN12 4QY // UK